

IPC-E3F2W-IL30

2MP ColorHunter IR Fixed Eyeball Network Camera




قابلیت های کلیدی

- پشتیبانی از پروتکل ONVIF
- دمای کارکرد -30 تا +60 درجه سانتیگراد
- مقاومت در برابر نفوذ آب و گرد و غبار IP67
- Ultra265, H.265, H.264, MJPEG
- دارای میکروفون و اسپیکر داخلی
- پشتیبانی از ROI
- OSD قابل تنظیم
- پشتیبانی از حالت راهرو 9:16
- نور مرئی و مادون قرمز 30 تا 50 متر
- کاهنده نویز دیجیتال 3D

Specifications

Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS					Digital Noise Reduction	2D/3D DNR
Lens	2.8mm@F1.6					Smart IR	Supported
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)	Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise
	2.8	43.4	17.4	8.7	4.3	Dewarping	N/A
Angle of View (H)	106.7°					HLC	Supported
Angle of View (V)	57.1°					BLC	Supported
Angle of View (D)	115.7°					Smart Features	Cross line, intrusion(based on human body detection),audio detection
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 80°		Rotate: 0° ~ 360°	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, SNMP
Minimum Illumination	Colour: 0.002Lux (F1.6, AGC ON) 0Lux with IR					Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Day/Night	IR-cut filter with auto switch (ICR)					Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below Plug-in free live view: Chorme 57.0+, Firefox 58.0+, Edge 16+, Safari 11+
Digital noise reduction	2D/3D DNR					Audio Compression	G.711
S/N	>52dB					Suppression	Supported
IR Range	30-50m IR range					Sampling Rate	8KHZ
White Light Range	30-50m white light range					Edge Storage	Micro SD, up to 128 GB
Wavelength	850nm					Network Storage	ANR,NAS(NFS)
IR On/Off Control	Auto/Manual					Network	10/100M Base-TX Ethernet
Defog	Digital Defog					Built-in Mic	Supported
WDR	120dB					Built-in Speaker	Supported
Frame Rate	Main Stream: 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;					Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 8.0WN/A
Video Bit Rate	128 Kbps~6 Mbps					Dimensions (Ø x H)	Ø118 x 95mm (Ø4.6" x 3.8")
9:16 Corridor Mode	Supported					Net Weight	0.30kg (0.66lb)
OSD	Up to 4 OSDs					Material	Metal + Plastic
Privacy Mask	Up to 4 areas					Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
ROI	Up to 8 areas					Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Motion Detection	Up to 4 areas					Surge Protection	4KV
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2					Ingress Protection	IP67
						Reset Button	N/A

Dimensions

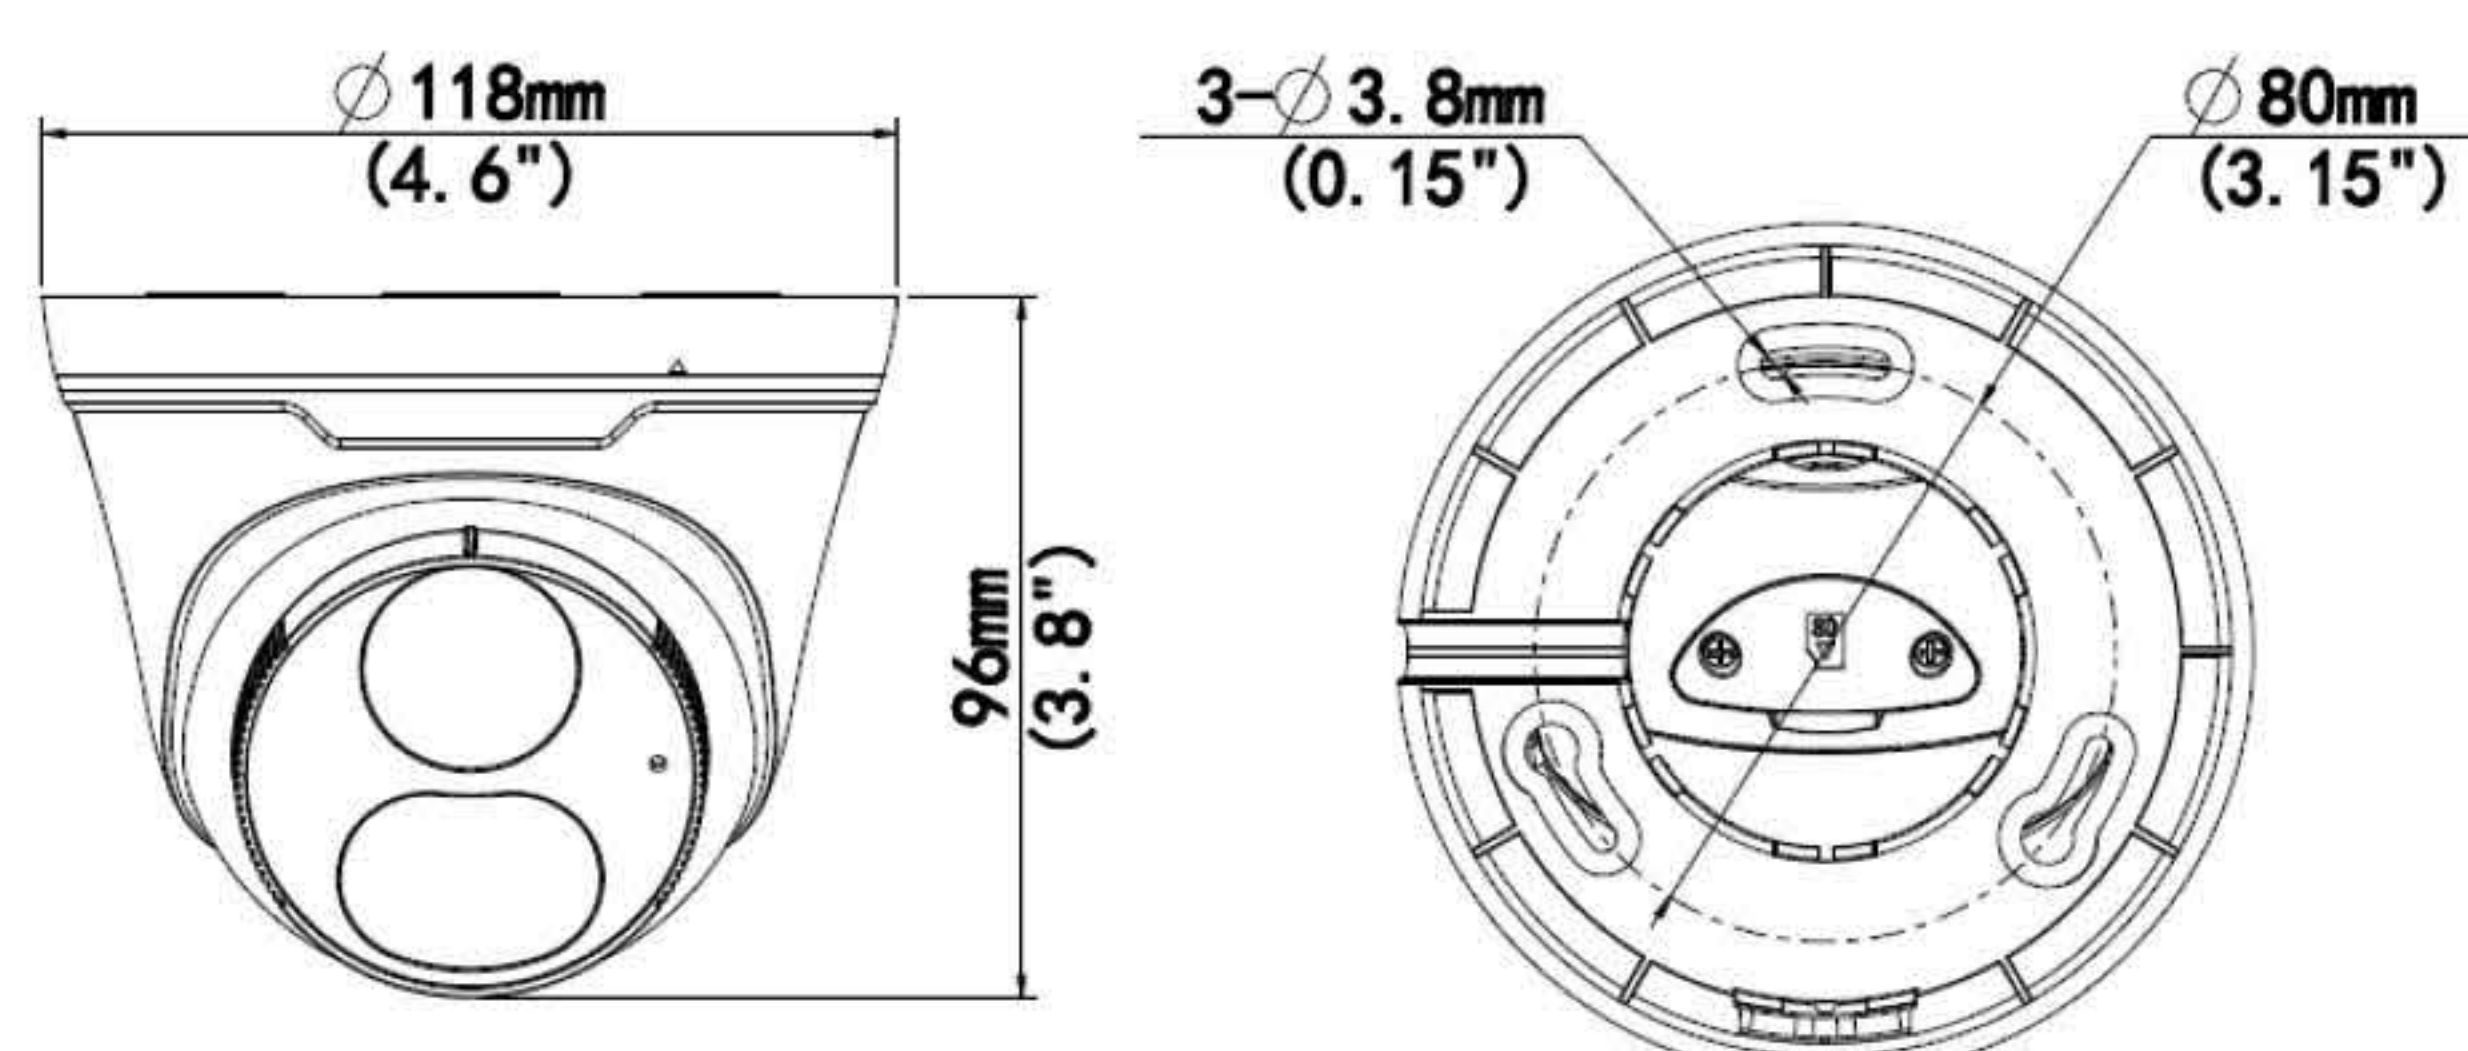

09337670698

