

IPC-P2F4W-I30S

4MP WDR Vandal-resistant Network IR Fixed Dome Camera




قابلیت های کلیدی

- قابلیت روز و شب
- IR هوشمند 30 تا 50 متر
- کاهنده نویز دیجیتال 3D
- OSD قابل تنظیم
- پایه لنز قابل تنظیم 3 حالت
- Ultra 256, H.265, H.264, MJPEG
- پشتیبانی از ROI
- پشتیبانی از پروتکل ONVIF
- دمای کارکرد -35 تا +60 درجه سانتیگراد
- بدنه ضد ضربه با استاندارد IK10
- مقاومت در برابر نفوذ آب و گرد و غبار IP67

Specifications

sensor	1/3", 4.0 megapixel, progressive scan, CMOS					OSD	Up to 8 OSDs
Lens	2.8mm@F2.0					Privacy Mask	Up to 8 areas
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)	ROI	Up to 8 areas
	2.8	63	25.2	12.6	6.3	Motion Detection	Up to 4 areas
Angle of View (H)	104.4°					Smart Features	Audio detection, Cross line, intrusion, object left, object removed, People counting, Face capture
Angle of View (V)	67°						
Angle of View (D)	135.7°					Audio Compression	G.711
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 75°		Rotate: 0° ~ 360°	Two-way audio	Supported
Shutter	Auto/Manual, 1 ~ 1/100000s					Suppression	Supported
Minimum Illumination	Colour: 0.03Lux (F2.0, AGC ON)					Sampling Rate	8KHZ
	0Lux with IR					Edge Storage	Micro SD, up to 256GB
Day/Night	IR-cut filter with auto switch (ICR)					Network Storage	ANR
Digital noise reduction	2D/3D DNR					Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
S/N	>55dB						
IR Range	30-50m IR range					Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Defog	Digital Defog					Audio I/O	Input: impedance 35kΩ; amplitude 2V [p-p] Output: impedance 600Ω; amplitude 2V [p-p]
WDR	120dB					Alarm I/O	1/1
Video Compression	Ultra 265, H.264, MJPEG					Network	1 RJ45 10M/100M Base-TX Ethernet
H.264 code profile	Baseline profile, Main Profile, High Profile					Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 5W
Frame Rate	Main Stream: 4MP (2592*1520), Max 20fps; 4MP (2560*1440), Max 25fps;					Dimensions (Ø x H)	Ø108.5 x 81mm (Ø4.28" x 3.2")
	3MP (2048*1520), Max 30fps;					Weight	0.45kg (0.99lb)
	Sub Stream: 2MP (1920*1080), Max 30fps;					Working Environment	-35°C ~ 60°C (-31°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Third Stream: D1 (720*576), Max 30fps					Ingress Protection	IP67
HLC	Supported					Vandal Resistant	IK10
BLC	Supported						
9:16 Corridor Mode	Supported						

Dimensions

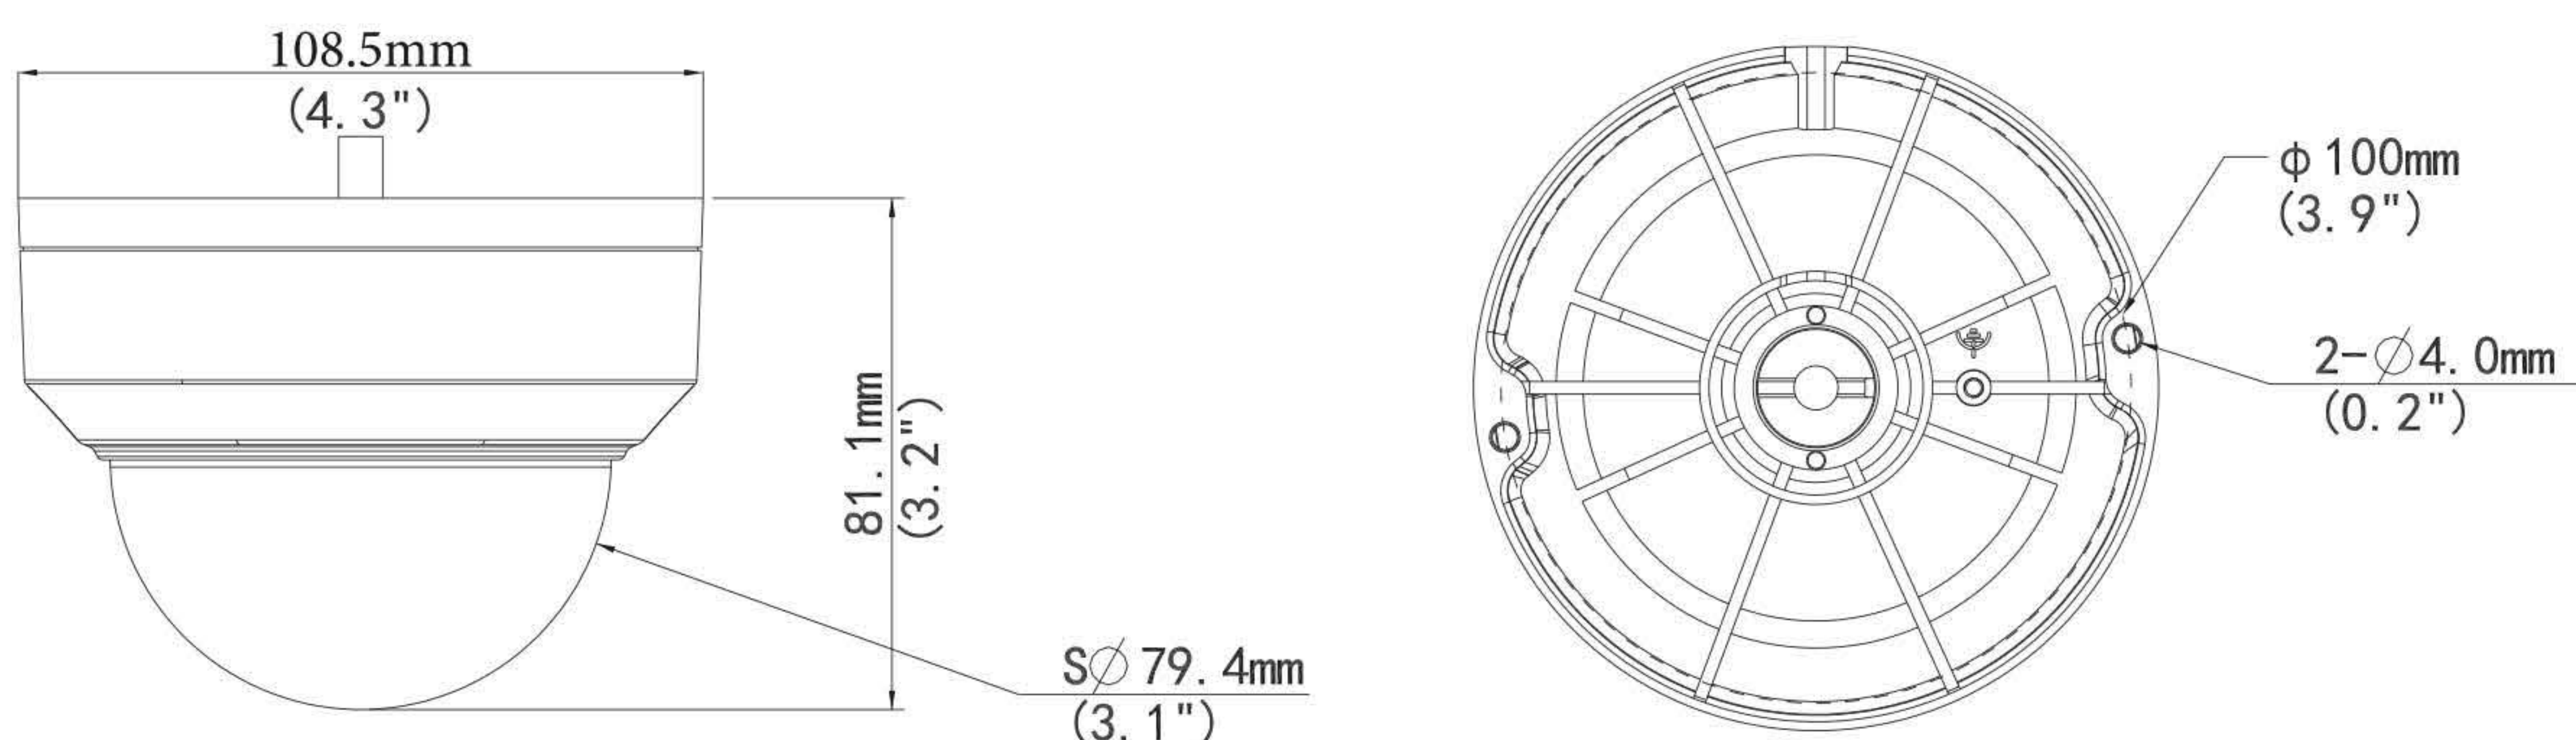

09337670698

