

IPC-P2F5W-I50S

5MP LightHunter Deep Learning Vandal-resistant Dome Network Camera



قابلیت های کلیدی



- قابلیت شب و روز
- IR هوشمند 50 تا 70 متر
- کاهنده نویز دیجیتال 3D
- Ultra265, H.265, H.264, MJPEG
- پشتیبانی ROI
- پشتیبانی از 3 استریم تصویر
- OSD قابل تنظیم
- پشتیبانی از پروتکل ONVIF
- دمای کارکرد -40 تا +60 درجه سانتیگراد
- بدنه ضد ضربه با استاندارد IK10
- مقاومت در برابر نفوذ آب و گرد و غبار IP67
- پایه لنز قابل تنظیم 3 حالت

Specifications

Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS				
Lens	2.8mm@F1.6				
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.8	63.0(206.7ft)	25.2(82.7ft)	12.6(41.7ft)	6.3(20.7ft)
Angle of View (H)	97.7°~79.6°				
Angle of View (V)	68.5°~56.6°				
Angle of View (D)	127.1°~97.9°				
Adjustment angle	Pan: 0°~355°		Tilt: 0°~80°		Rotate: 0°~355°
Shutter	Auto/Manual, 1 ~ 1/100000s				
Minimum Illumination	Colour:0.003lux (F1.6, AGC ON) 0 lux with IR				
WDR	120dB				
Day/Night	IR-cut filter with auto switch (ICR)				
IR Range	50~70m IR range				
Wavelength	850nm				
IR On/Off Control	Auto/Manual				
Defog	Digital Defog				
Frame Rate	Main Stream: 5MP(2592*1944),Max 20fps; 4MP(2560*1440),Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps				
Video Bit Rate	128 Kbps~16 Mbps				
ROI	Supported				
Privacy Mask	Up to 8 areas(8 blacks/8 mosaics)				
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Digital noise reduction	2D/3D DNR				
Flip	Normal/Flip Vertical/Flip Horizontal/180°/90°Clockwise/90°Anti-clockwiseSupport				
HLC/BLC	Support				

Smart Features	Deep learning, Cross line, intrusion detection, Enter area, Leave area, Face Capture (maximum 8), People flow counting and Crowd density monitoring, Audio detection
General Function	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Audio Compression	G.711U, G.711A
Two-way Audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Edge Storage	Micro SD, up to 256 GB
Network Storage	ANR, NAS(NFS)
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Audio I/O	Audio cable
	1 Input: impedance 35kΩ; amplitude 2V [p-p] 1 output: impedance 600Ω; amplitude 2V [p-p]
Network	1 * RJ45 10M/100M Base-TX Ethernet
Power	DC12V(±25%), PoE(IEEE 802.3af)
	Power consumption: Max 5W
Dimensions (Ø x H)	Ø109 x 81mm(Ø4.3" x 3.2")
Weight	0.43kg(0.95lb)
Working Environment	-40°C ~ 60°C (-40°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-40°C ~ 70°C (-40°F ~ 158°F), Humidity: ≤95% RH (non-condensing)
Surge protection	2KV
Vandal Resistant	IK10
Ingress Protection	IP67

Dimensions

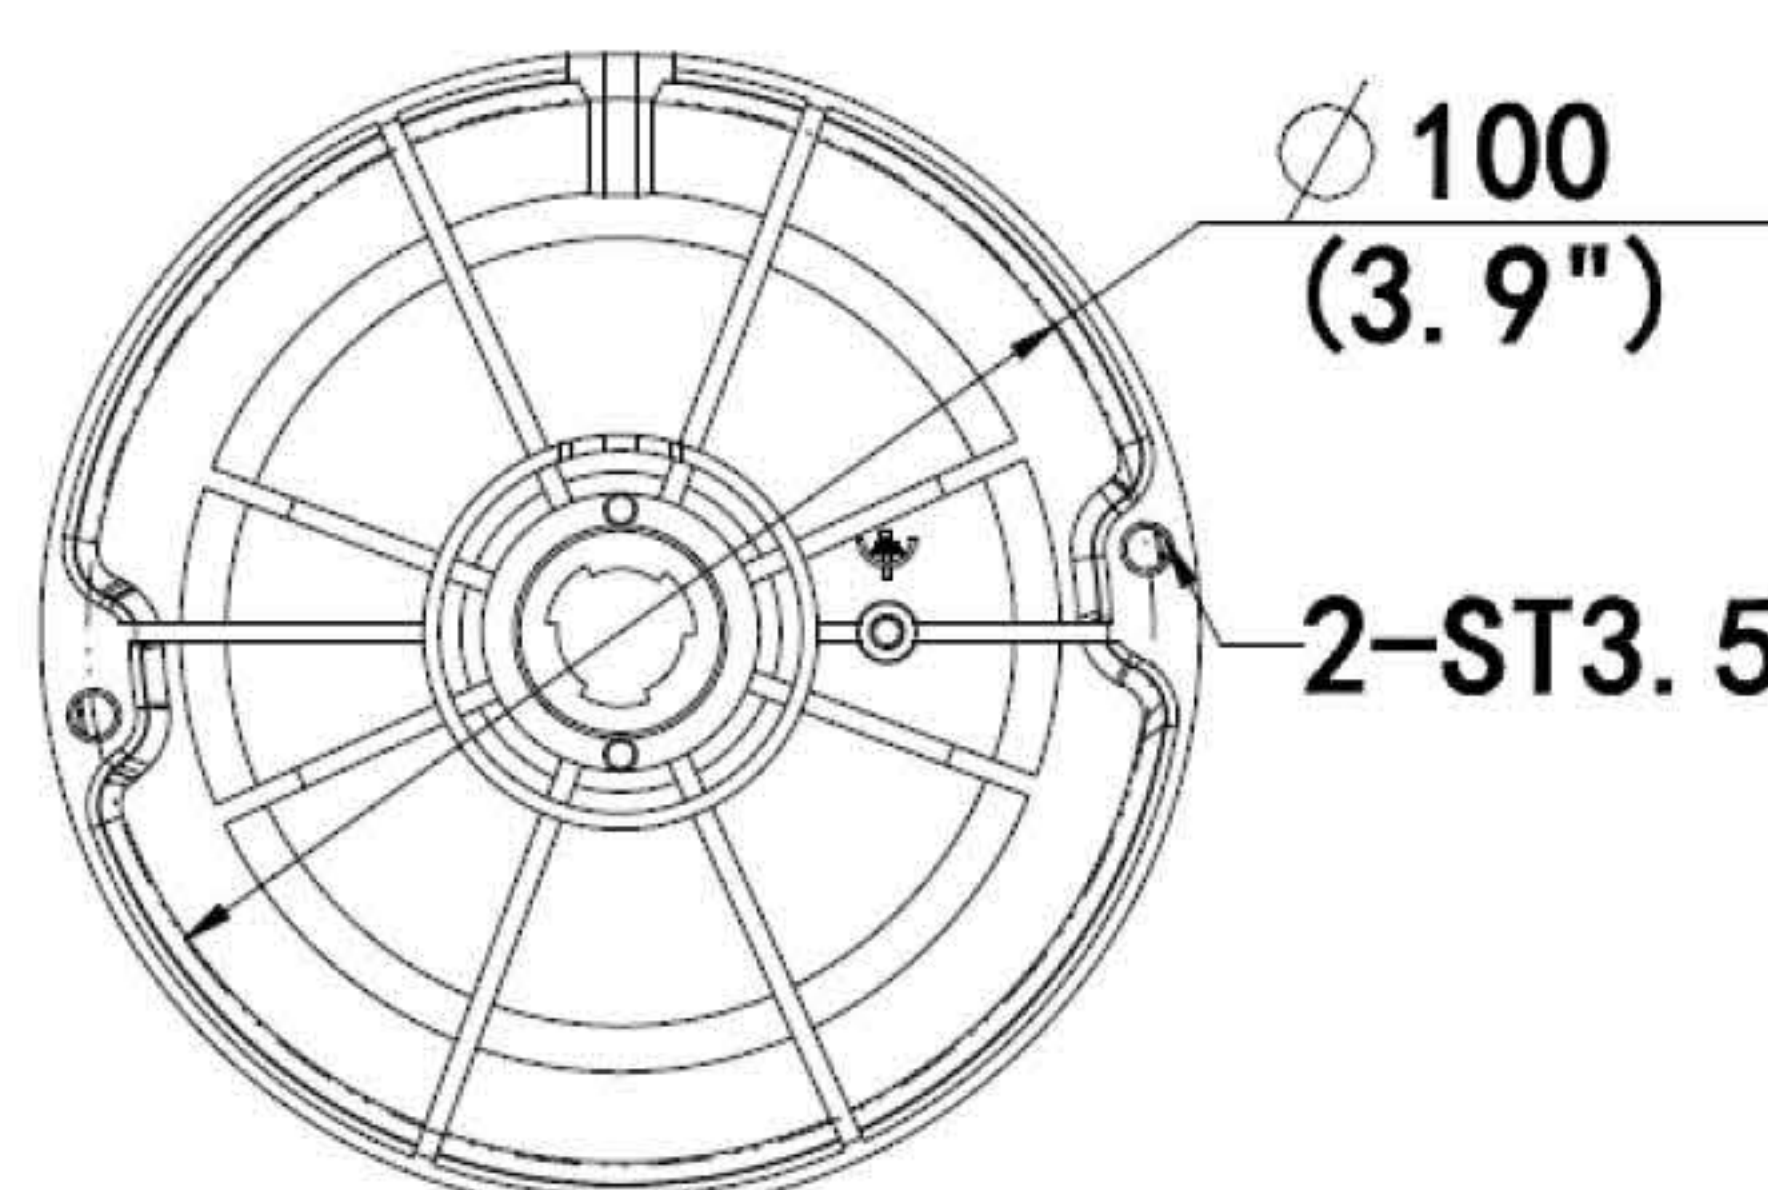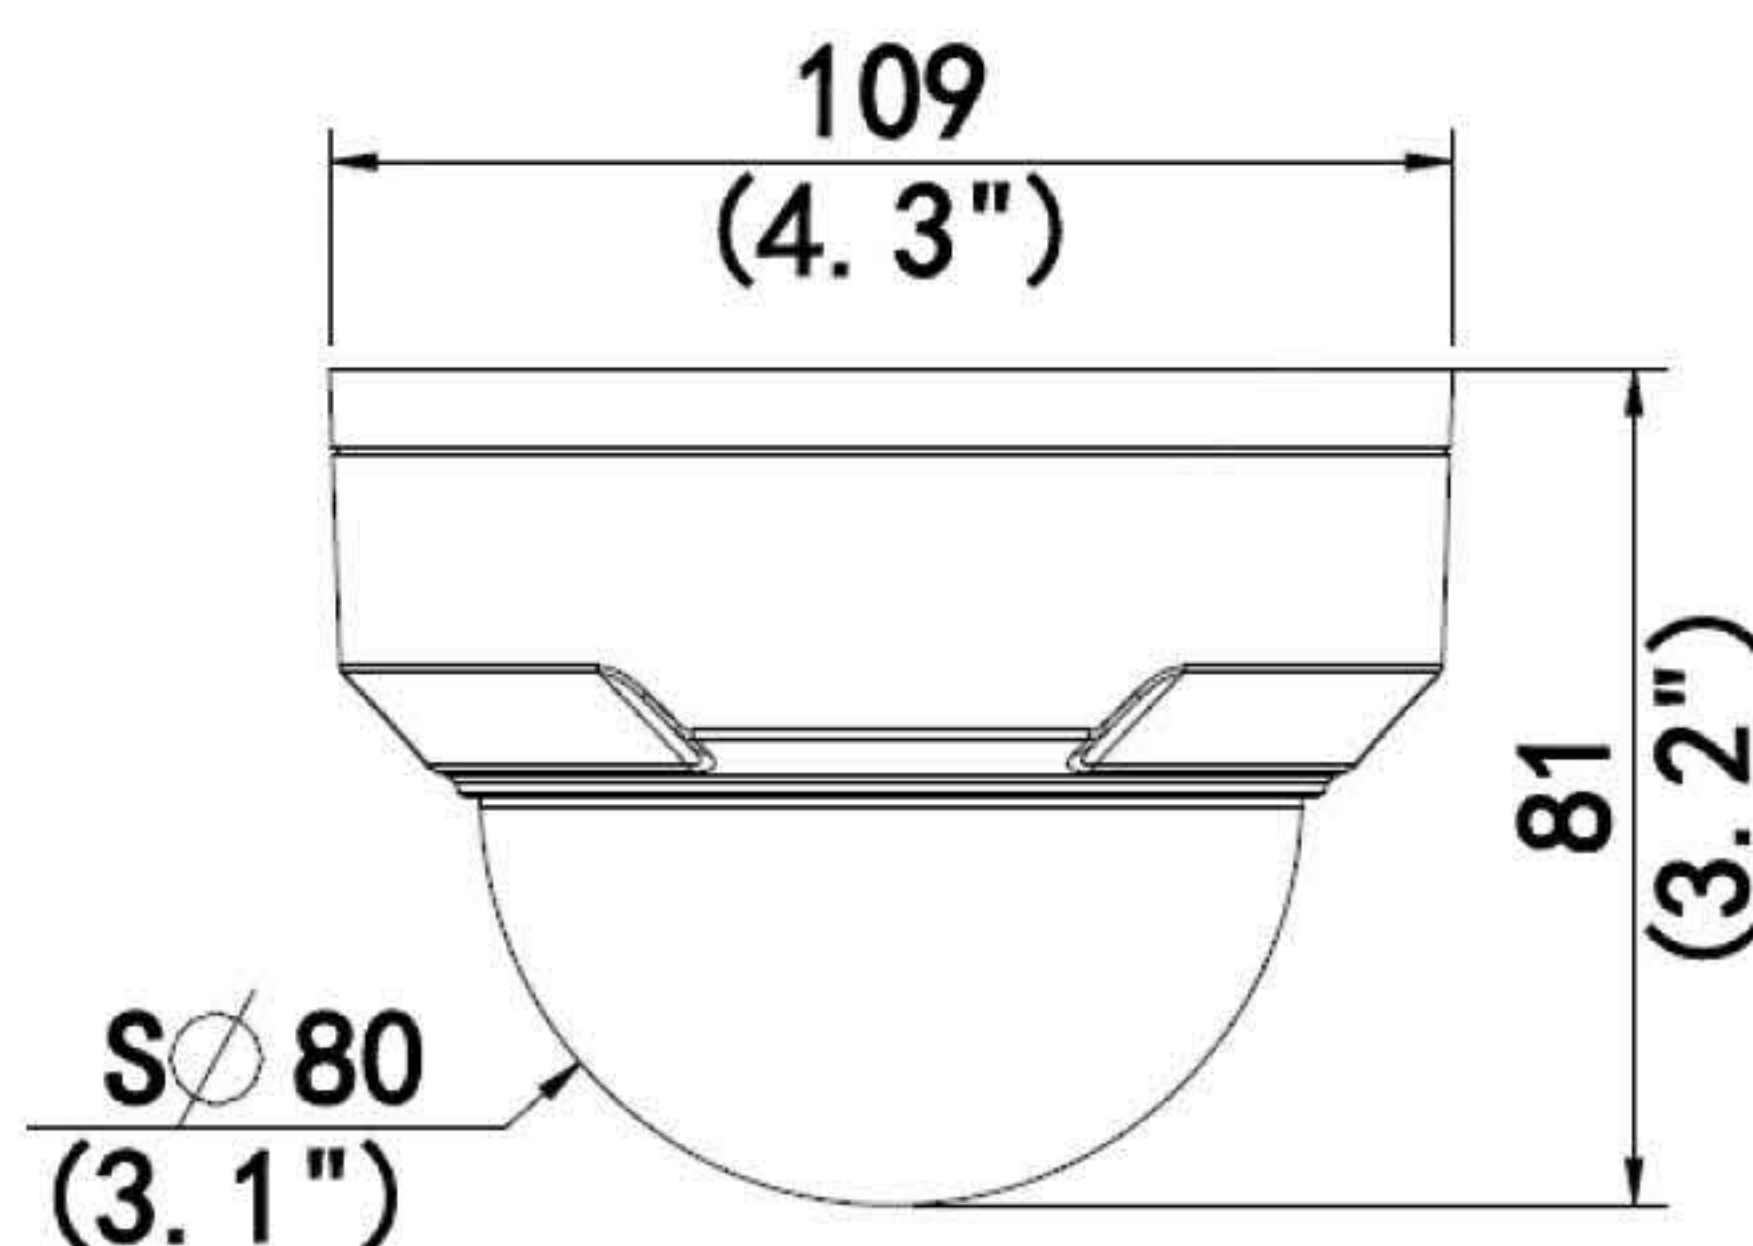

09337670698

